


Specification Sheet

Part Number: FC1.2AK2

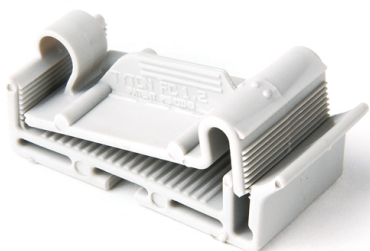

Adjustable height feature allows the clamp to close to the exact height of the ribbon cable.

Releasable for easy access to cables when necessary.

Flat Ribbon Cable Clamp, Adhesive, 1.2" Max Cable Width, 0.156" Hole Dia, PA66, Gray, 50/pkg

Article Number 154-00013

Type FC1.2A

Color Gray (GY)

Quantity Per bag

Product Description HellermannTyton's flat ribbon clamps route, protect, and secure flat ribbon cables without damage to sensitive wires and cables. The unique, adjustable height feature allows the clamp to close to the exact height of the ribbon cable, using only as much force as needed to secure the cable. The releasable feature allows simple opening when access to the cable is necessary.

Short Description Flat Ribbon Cable Clamp, Adhesive, 1.2" Max Cable Width, 0.156" Hole Dia, PA66, Gray, 50/pkg

Global Part Name FC1.2A-PA66-GY

Length L (Imperial) 0.81

Length L (Metric) 20.57

Width W (Imperial) 1.5

Width W (Metric) 38.1

Height H (Imperial) 0.5

Height H (Metric) 12.7

Cable Tie Width Max (Imperial) 1.2

Cable Tie Width Max (Metric) 30.48

Mounting Hole Diameter D (Imperial) 0.157

Mounting Hole Diameter D (Metric) 4.0 mm

Mounting Hole Diameter D Min (Imperial) 0.157

Mounting Hole Diameter D Max (Imperial) 0.157

Mounting Hole Diameter D Max (Metric) 4.0

Material Polyamide 6.6 (PA66)

| | |
|--------------------------------|---|
| Material Shortcut | PA66 |
| Adhesive | Acrylate with base of polyurethane foam |
| Flammability | UL 94 V-2 (excluding adhesive) |
| UV Resistant (Yes/No) | No |
| Adhesive Operating Temperature | to +230°F (+110°C) |
| Operating Temperature | -40°F to +185°F (-40°C to +85°C) |
| Reach Compliant (Article 33) | No |
| ROHS Compliant | Yes |
| Package Quantity (Imperial) | 50 |
| Package Quantity (Metric) | 50 |
| Customs Number | 3926909988 |

About HellermannTyton

HellermannTyton is a global manufacturer of cable management and identification solutions for automotive, solar, electrical, construction, industrial automation, broadband and other OEM markets. The company's integrated approach to product design, sustainability, production, quality assurance and delivery is optimized to benefit local and global customers. HellermannTyton operates in 39 countries, with North American headquarters in Milwaukee, Wisconsin. (www.hellermann.tyton.com).

