

# **Model 3400-GATE**

**Electronic LCD Counter for Lift Gate** 



The Model 3400-GATE LCD Counter provides a large display with 0.28" [7mm] high characters. Designed for liftgates, it incorporates an internal delay circuit to avoid inaccurate counts.

The 3400-GATE is designed to be used on liftgates installed on trucks and commercial vehicles of all types. Regular servicing of the tailgate is crucial to ensure they are working to optimum levels and do not break down. The 3400-GATE incorporates a delay circuit, instructing the counter to count only if the activation switch is held ON for more then 5 seconds, which equates to approximately 2 feet of travel. If the activation switch is pulsed ON and OFF rapidly, the counter will ignore that signal and no count will occur.

## **Key Features**

- · Totally sealed from moisture and dirt
- 5 second delay for count
- Always on display
- · Compatible with 12V and 24V vehicles
- Logic LOW <1VDC. Logic HIGH 4-30VDC</li>
- Count on a High to Low transition

## **Options**

- Optional Remote Reset
- · Custom Brackets by request

# **Applications**

















## **Specifications**

LCD with large 0.28" [7mm] high figures **Display** 

black on light background

Reset Remote and non-reset.

**Accuracy** 100% [provided signal meets stated

parameters]

8 digits (9999999) **Displays** 

4-30VDC Inputs

Power Self-powered battery life 10+ years

**Terminations** Standard 0.250" [6.4mm] spades

CE, SAE, NEMA 4/4X/IP66 compliant **Approvals** 

Totally sealed from moisture and dirt. **Enclosure** 

NEMA 4/4X, 12 & IP66 compliant from the front when properly mounted using

the optional gasket.

**Environmental** 

**Operating Temp** -10°C to +60°C [14°F to +140°F]

-20°C to +70°C [-4°F to +158°F] **Storage Temp** 

**Humidity** 95% RH per SAE J1378

44 to 55g's per SAE J1378 Shock

1000VAC 50/60 Hz for 1 minute Dielectric

to European WEEE and RoHS Compliance


**Directives** 


Totally sealed Sealing

**EMC Compliance** EN61326

Weight 1 oz. [28g]

#### **Dimensions**

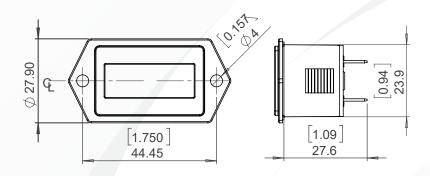



### **Part Numbers**

**Part Number** 

3400-GATE 3400-XXXX 5003-010

**Description** 

DC Counter 2-hole case 1/4" spade terminal non-reset

**Custom Option** 

NEMA 4X Gasket two hole mount





6601 Lyons Rd, Suite H-7 Coconut Creek, Florida FL 33073,

Tel: +1 954 725 6699 Email: sales.usa@trumeter.com

Frumeter (Europe) Alfred Street Bury, BL9 9EF Tel: +44 161 674 0960 Email: sales.uk@trumeter.com

Lot 5881, Lorong Iks Bukit Minyak 1 Taman Perindustrian Iks, 14000 Bukit Tengah Penang, Malaysia Web: www.idtworld.com Tel: + 604 5015700